

SWIFTATE

2025 COLLECTION

XTRC

Recessed Corner Light

Flush-mount corner fixtures for steps, edges, and architectural recesses. Minimal profile, maximum visual impact.




XTRc25-701

RECESSED LUMINAIRES




CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	76*76*55mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

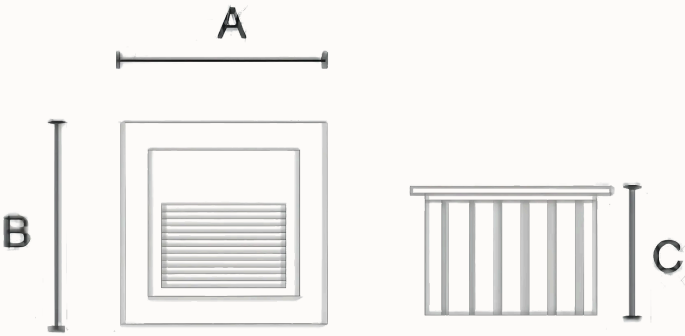


XTRc25-702

RECESSED LUMINAIRES

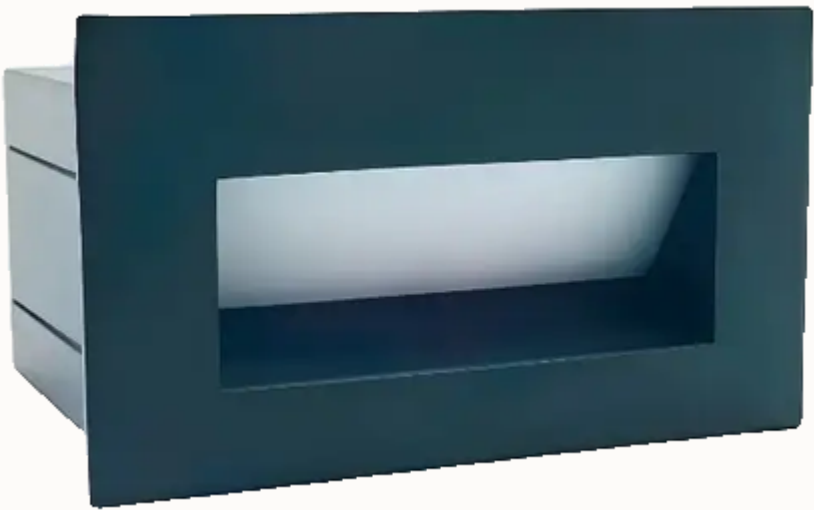

CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	78*40*60mm 123*40*60mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM




XTRc25-703

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
POWER FACTOR	0.6		

DIMENSIONS UNIT: MM

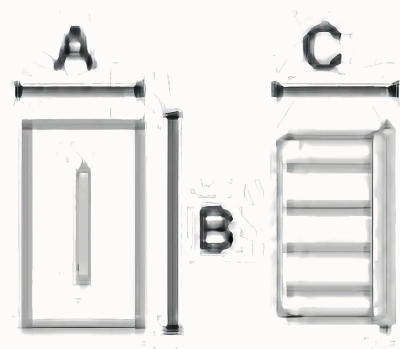


XTRc25-704

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
POWER FACTOR	0.6		

DIMENSIONS UNIT: MM

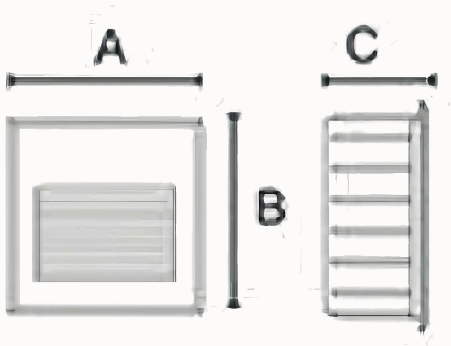


XTRc25-705

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
POWER FACTOR	0.6		

DIMENSIONS UNIT: MM




XTRc25-706

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
POWER FACTOR	0.6		

DIMENSIONS UNIT: MM

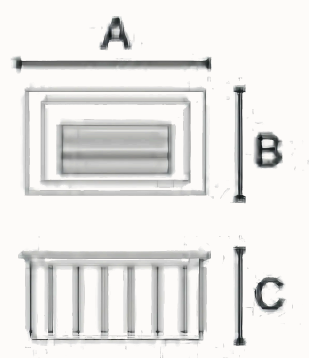


XTRc25-707

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
POWER FACTOR	0.6		

DIMENSIONS UNIT: MM




XTRc25-710/711

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	100*60*50mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

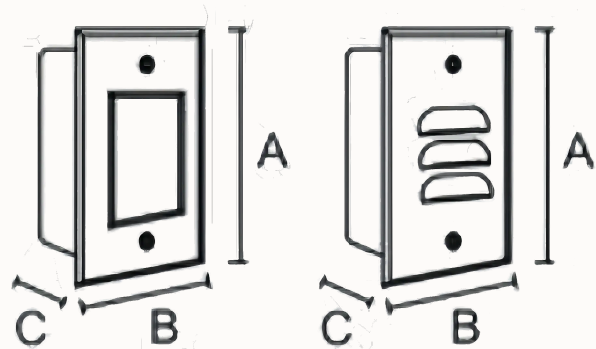


XTRc25-712/713

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	100*60*50mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

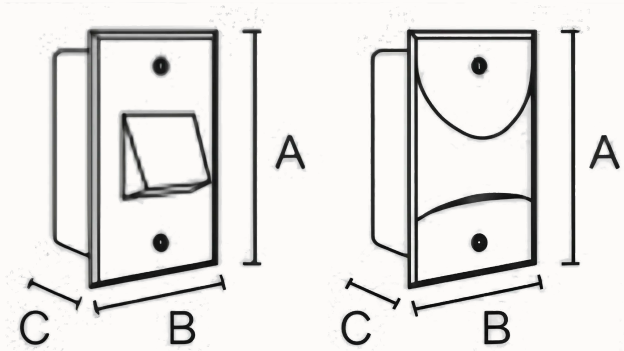


XTRc25-714/715

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	100*60*50mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

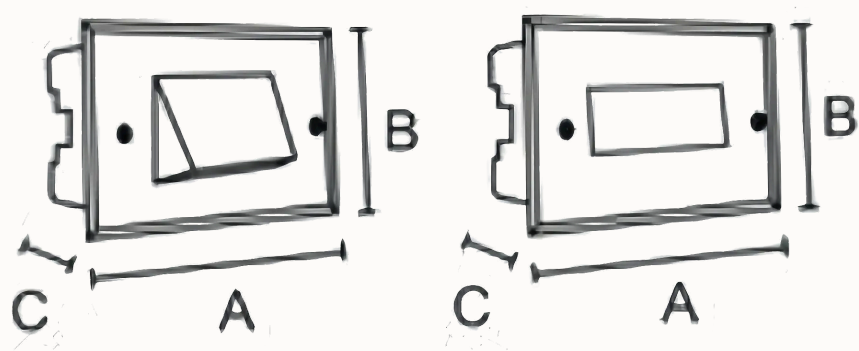


XTRc25-716/717

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	100*60*50mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

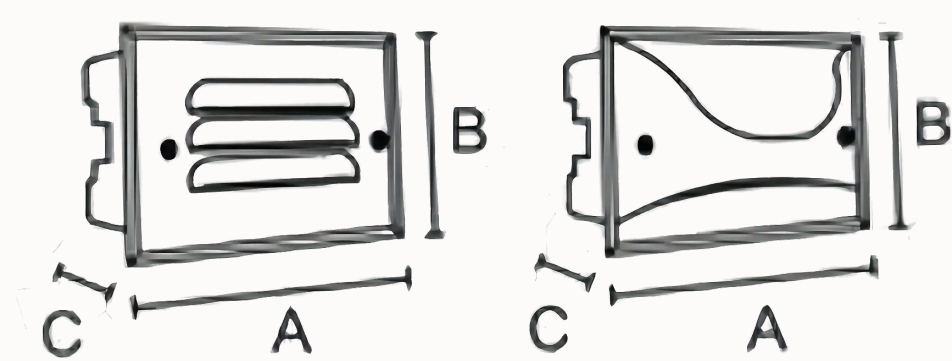

XTRc25-718

RECESSED LUMINAIRES




DIMENSIONS UNIT: MM

Dimension drawing available on request

XTRc25-719

RECESSED LUMINAIRES

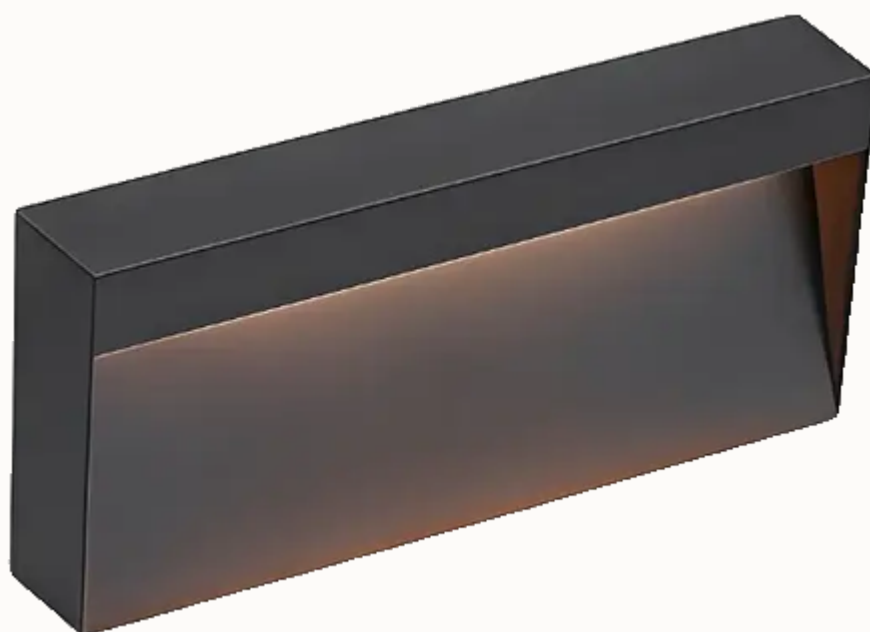

DIMENSIONS UNIT: MM

Dimension drawing available on request


XTRc25-709L/709

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	200*50*55mm 100*50*55mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

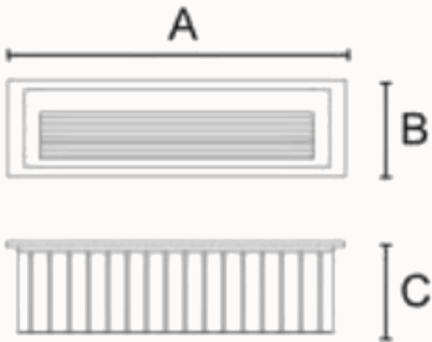

XTRc25-708L/708

RECESSED LUMINAIRES



CRI	80	CCT	3000K-6500K
MATERIAL	Glass + Die-cast Aluminum	IP RATING	IP54
CUT-OUT	50*200*55mm 50*100*55mm	POWER FACTOR	0.6

DIMENSIONS UNIT: MM

